


ICE HOCKEY

Readability 60 m

452 GE 9000

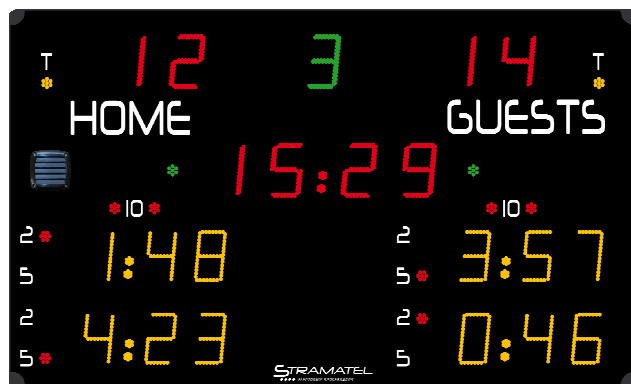

(non contractual picture)

Compliant
with the
latest 2021
IIHF rules



Composition

- 1 scoreboard
- 3 control consoles
- 3 carrying cases for control consoles
- 1 mains cable
- Operating and installation instructions

Description

Use:	Indoor – tropicalized electronic parts for ice rink atmosphere
Transmission:	Radio (868 MHz)
Readability:	60m, angle >160°
Dimensions:	1900 x 1150 x 90mm
Weight:	35 kg
Power supply:	230V / 50-60Hz
Protection:	Unbreakable mat polycarbonate front face (DIN 18032-3)
Integrated Horn:	116dB at 1m
Mains cable:	25 m – Type: 230V, 3G, 0.75 mm ²

Display functions

Score:	2 x 2 red LED digits (16 cm)
Period:	1 green LED digit (15 cm)
Time stop indicator:	2 x 1 green LED dot
Timer/Rest period:	4 red LED digits (16 cm) + blinking points
Time out indicator:	2 x 1 yellow LED dot
Exclusions timers:	4 x 3 yellow LED digits (15cm)
Penalty indicators:	12 red LED dots (1, 2, 3, 5 or 10 minutes)
Day time:	when the scoreboard is not in use

Control consoles

3 consoles: (340 x 175 x 60 mm) with LCD screen with 2 lanes of 20 characters (9mm high)

- **1 Main** console: management of the main functions
- **2 Control consoles for exclusion timers**

1 charger: Hold the consoles in charge when there are not in use. (Autonomy max 16 h)

Connexion plugs: DIN between the consoles

USB Port: For program update or connect PC keyboard

Programme: Ice Hockey meeting the latest 2021 IIHF requirements + « Free mode » to create your own sport discipline or for additional sports
Saved sport programs: create and save your own sport programs with personalized settings

Multilingual Programme

Options

TV Interface (RS 485):	Data transmission for TV broadcasting
Sound Interface:	Connection with sport hall sound system - Horn sound amplifier
DCF or GPS Antenna:	For accurate time synchronisation
Cable set:	Cable mode for radio controlled scoreboard
Goal indicators:	Goal and time stop indicators (pair) - cable controlled.

