


MULTISPORT SHOT-CLOCKS Readability 130 m

BASKET BALL

4-SIDED SC24 TIMER SUPER PRO

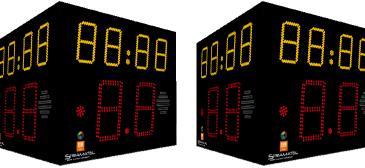

(non contractual pictures)



EUROLEAGUE

BASKETBALL



Composition

2x 4-sided display units 1 control console 1 carrying case for control console 2 mains cable 2x junction boxes and transmission cables Operating and installation instructions

Description (per display unit)

	· · · · · · · · · · · · · · · · · · ·
Use:	Indoor
Transmission:	Cable. Works only with STRAMATEL Multisport scoreboard
Readability:	130m, angle >160°
Dimensions:	600 x 770 x 770mm
Weight:	25 kg
Power supply:	230V / 50-60Hz
Power consumed:	143 VA
Protection:	Unbreakable matt polycarbonate front face (DIN 18032-3)
Integrated Horns:	2 horns, 116dB at 1m
Mains cable (supplied):	1x25 m – Type: 230V, 3G, 0.75 mm²
Cable controlled:	Junction Box + 25 m transmission cable (scoreboard/junction box) –
	Type: DIN/DIN + 25 m transmission cable (junction box/main junction box) – Type: phone cable 2 pairs 6/10 th

Display functions (1 side of 1 display unit) Shot-clock:

Game clock repeater: 24/14s violation:

2 red LED digits (25 cm) + 1 point for display of seconds and tenths of second 4 yellow LED digits (16 cm) + blinking points 1 red LED point

Control consoles

1 console: (145 x 150 x 40 mm) with LCD screen with 1 lane of 20 characters (9mm high)

Shot-clock controller -

Works only with STRAMATEL Multisport scoreboard

Options Led Strips:

Electric light to be installed behind the backboard (FIBA or Euro league rules)

Support frame:

Support frames for basketball backstops



SC24 TSP 4F EUROLEAGUE_GB _A